

USB RFID

Dual Band Registration Card Reader

(125Khz & 13.56Mhz)

AR-725(RS)

Quick Register User Card with **SOYAL 701Client Software**



- USB HID: Driver free, just Plug and Play
- Support WIN XP, WIN 7, WIN10



USB



Quickly Read
Card Number



Support
Dual-Band



LED indicator


USB RFID

Dual Band(125Khz & 13.56Mhz)Registration Card Reader


Specifications USB RFID Dual Band Card Reader AR-725(RS)

Power Supply	5VDC
Frequency	125kHz & 13.56MHZ
Power consumption	<0.5W
Interface	USB 2.0 Virtual COM Port HID
Power Supply Mode	Powered by USB/ DC 5V
Temperature	-20 ° C to +65 ° C
Applicable Card Types	EM 125K Mifare DESFire Ultra Light
Color	Black
Housing Material	ABS (Soft Touch Finish)
Dimension(mm)	110(L)X79(W)X26(H)
Weight(g)	230±10

Dimension

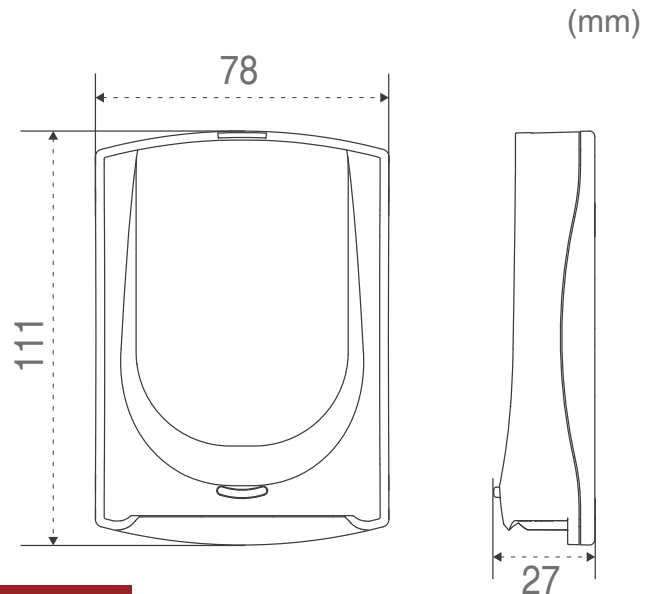

Features

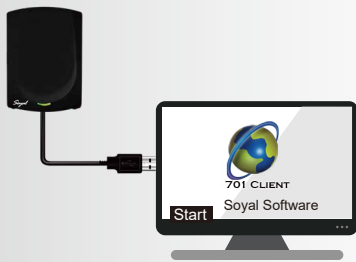

► USB HID: Driver free, just Plug and Play

USB RFID Card Reader (725RS) support just Plug and Play, the simplest way to operate, no installation or driver needed.

► Support WIN XP, WIN 7, WIN10


Support most of operating system in the market, increase users' convenient.



► Quick Register User Card with SOYAL 701Client Softwar

(Support software version 701 Client Ver 9.01 and above)

In 701 Client when configuring user's data, with USB RFID Card Reader (AR-725RS) adding card number will be quicker, moreover it support EM (125kHz), Mifare, Desfire, and Ultra Light card format.

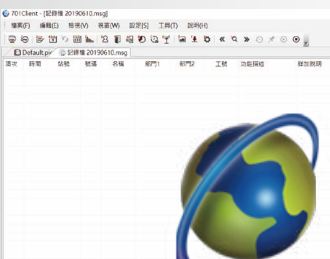


701 CLIENT

Quick Start

STEP 1

Plug in USB RFID Card Reader (AR-725RS) into the USB port of your PC

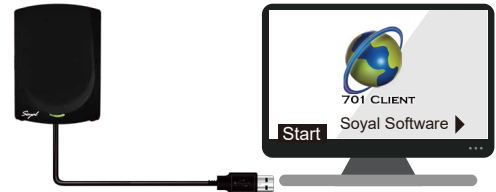

STEP 2


Run 701 Client software and go to option [8 User Cards Edit]



STEP 3

Place the card into AR-725RS and it will automatically adding card number into the Card UID field

If placing the next card into AR-725RS, 701Client will jump into the next user, that way adding card number for big batch is much more easier using AR-725RS (Moreover, card format shows in 701 Client will follow the original card format (ABA/ WG 34/ WG 26/ HEX) no need to convert it.

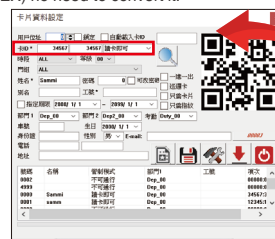

*Note: "Lock" option must be untick

SOYAL
ACCESS CONTROL SYSTEM

www.soyal.com | RoHS Compliant | COR FC CE | V190610

Authorized Distributor