



# SWITCH & PUSH BUTTONS SERIES

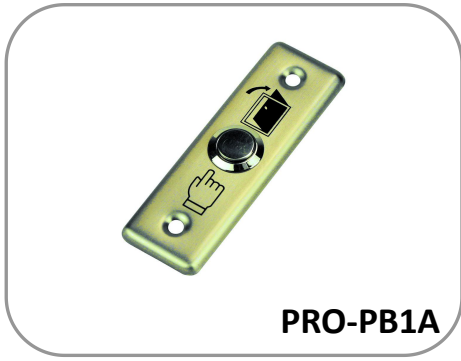

**PRO-PB1A**

## Door Release Button (Stainless steel)


Size: 90L×29W×24H (mm)  
Signal Output: NC COM  
Suitable for: Hollow Frame  
Mechanical life: 500,000 times  
Weight:0.03KG



**PRO-PB2A**

## Door Release Button (Stainless steel)


Size: 90L×90W×30H (mm)  
Signal Output: NC COM  
Suitable for: Hollow Frame  
Mechanical life: 500,000 times  
Weight:0.06KG



**PRO-PB5A**

## Door Release Button (Plastic)



Size: 86L×86W×38H (mm)  
Signal Output: NO COM  
Feature: Fail Safe  
Mechanical life: 500,000 times  
Weight: 0.06KG



**PRO-PTE300**

## Infrared Exit

Size: 115L×70W×29H (mm)  
Voltage: 12V DC  
Signal Output: NO COM  
Feature: Fail Safe  
Suitable for: Entrance  
Exit  
Automation Control System  
Mechanical life: 500,000 times  
Weight: 0.1KG

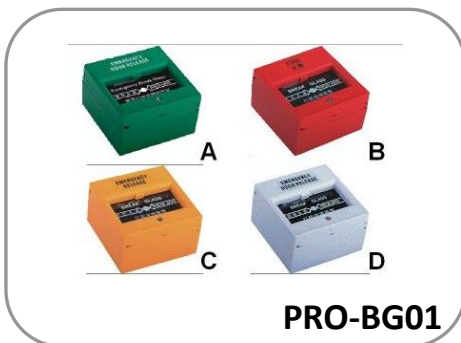

**PRO-BG01**

## Break Glass Call Point

Size: 86L×86W×50H (mm)  
Material: Fireproof  
Suitable for: Entrance  
Exit  
Escape Vent  
Output Contact: NC COM  
Color: A:Green B:Orange  
C:Red D:White  
Weight:0.15KG

