



# Push Button Series

## AR-PB2 Full Stainless Steel Push Button



## AR-PB5 Stainless Steel Push Button (No Power Supply Needed)




## AR-101-PBI-S Touch-less Infrared Sensor Push Button



## AR-101-PBI-L Touch-less Infrared Sensor Push Button



## AR-888-PBI-S Flush Mounted IR Push Button (Active distance: 4-stage adjustment within 2-10cm)

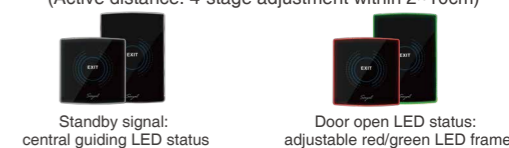

### Features

- Flush mounted design is thin and aesthetics, full stainless steel material make it durable.
  - Three types for installation on various sites: Slim type, US type and EU type.
  - Weather resistance design for indoor and outdoor use.
  - Welcome customized logo with laser engraving on the panel to enhance the overall image quality of the building or community.
  - Conventional switch no power needed, easy installation and long life span.
- Flush mounted design is thin and aesthetics, full stainless steel material make it durable.
  - Three types for installation on various sites: Slim type, US type and EU type.
  - Built-in multiple sets of membrane switches, can be triggered by pressing the button at any angle, with a life time of more than 500,000 times.
  - Welcome customized logo with laser engraving on the panel to enhance the overall image quality of the building or community.
  - No need external power supply, easy to use.
- Flush mounted design is thin and aesthetics, Bi-color LED ring shine and light your life.
  - Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
  - Three types for installation on various sites: Slim type, US type and EU type.
  - Modular design offer the flexibility to install it on the decoration surface on site rather than matching it with standard panels only.
  - The physical contact feature allows door open under no power supply situation just by pressing the button.
- Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
  - Three types for installation on various sites: Slim type, US type and EU type.
  - Modular design offer the flexibility to install it on the decoration surface on site rather than matching it with standard panels only.
  - The physical contact feature allows door open under no power supply situation just by pressing the button.
  - The new button we designed is suitable for installation as both door exit button and also lift floor button.
  - The sensing distance can be adjusted from 0.5cm to 8cm.
- Flush mounted design is thin and aesthetics, Bi-color LED ring shine and light your life.
  - Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
  - US type and EU type for choice and installation on various sites.
  - LED ring color is changeable according to user needs.
  - Anti-sunlight and infrared interference design
  - Waterproof rating IP65, suitable for indoor and outdoor installation.
  - The infrared reading range is adjustable according to the needs.

### Specification

Voltage	None / DC 12V (LED)	Voltage	None	Voltage	DC 9-24V	Voltage	DC 9-24V	Voltage	DC 9-24V
Current	LED : 12VDC / 10mA	Current	-	Current	DC 12V Standby: 35mA / Max. during activation: 65mA	Current	DC 12V Standby: 30mA / Max. during activation: 75mA	Current	DC 12V Standby: 35mA / Max. during activation: 65mA
Contact capacity	30VDC / 100mA	Contact capacity	30VDC / 100mA	Contact capacity	30VDC 1A / 125VAC 0.3A	Contact capacity	30VDC 1A / 125VAC 0.3A	Contact capacity	30VDC 1A / 125VAC 0.3A
Output Contact	N.O. / N.C.	Output Contact	N.O.	Output Contact	1 Form C (1A / VAC/VDC 30V)	Output Contact	1 Form C (1A / VAC/VDC 30V)	Output Contact	Relay(Form C)

### Slim US Type

Model No.	AR-PB2-041108	AR-PB5-041108	DMET-101PJ01	DPLA-101PB-L-6A	---
Dimension	108(H)X41(W)X4/15(D)	108(H)X41(W)X2/13(D)	108(H)X41(W)X2/31(D)	116(H)X46(W)X6(D)	---
Print Text	SOYAL with Door Exit logo	SOYAL+EXIT	N/A	Exit logo	---

### Rectangle US Type

Model No.	AR-PB2-072122	AR-PB5-068108	DMET-101PJ05	DPLA-101PB-L-7A	AR-PBI-888(US)
Dimension	122(H)X72(W)X4/15(D)	108(H)X68(W)X2/13(D)	122(H)X72(W)X2/31(D)	114(H)X69(W)X6(D)	118(H)X81(W)X9/42(D)
Print Text	SOYAL with Door Exit logo	SOYAL+EXIT	N/A	Exit logo	SOYAL+EXIT

### Square EU Type

Model No.	AR-PB2-068108	AR-PB2-086086	DMET-101PJ03	DPLA-101PB-L-8A	AR-PBI-888(EU)
Dimension	86(H)X86(W)X4/15(D)	86(H)X86(W)X2/13(D)	86(H)X86(W)X2/31(D)	86(H)X86(W)X6(D)	86(H)X86(W)X9/42(D)
Print Text	SOYAL with Door Exit logo	SOYAL+EXIT	N/A	Exit logo	SOYAL+EXIT